


มันไจซ์ยางโอตานิ

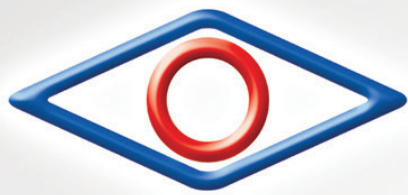

OTANI®

DRIVING CONFIDENCE

**AGRICULTURAL
TIRE
CATALOG 2024**

WWW.OTANITIRE.COM



K-81

K-82

T-22

T-25

F-30

F-32

RIM DIAMETER	TIRE SIZE	PR	PATTERN	TRA CODE	TYPE	STANDARD RIM WIDTH	MAXIMUM SPEED	RELATIVE PRESSURE		MAXIMUM LOAD	INFLATED DIMENSION (mm)		TREAD DEPTH
						(inch)	(km/h)	(psi)	(kPa)	(kg)	SECTION WIDTH	OVERALL DIAMETER	(mm)
14"	6-14	4	F-33	R1/G1	TT	5AJ	30	28	195	300	162	655	28
	7-14	4	F-33	R1/G1	TT	5AJ	30	25	170	355	178	687	28
	6.50-14	6	F-33	R1	TT	4.50E	30	46	315	710	183	699	19
15"	4.00-15	6	T-22	I1	TT	3.00D	30	64	440	425	114	610	10
	11L-15SL	10	K-81	I1/F3	TL	8LB	30	44	305	1060	256	830	12
16"	6.00-16	6	T-22	I1	TT	4.00E	30	48	330	560	177	740	15
		8	T-22	I1	TT	4.00E	30	65	450	670	180	750	15
	7-16	4	F-33	R1/G1	TT	5AJ	30	24	165	387	183	740	26
		8	F-30	-	TT	5.50F	40	40	275	875	207	893	57
	7.50-16	4	F-33	R1	TT	5.50F	40	35	240	750	216	814	20
		8	F-33	R1	TT	5.50F	40	54	370	875	220	816	20
		8	F-34	R1	TT	5.50F	40	54	370	875	208	814	25
		6	T-22	I1	TT	5.50F	40	44	305	670	210	814	20
		8	T-22	I1	TT	5.50F	40	54	370	875	210	814	20
		8	T-25	I1	TT	5.50F	40	54	370	875	208	805	17
	8-16	4	F-33	R1/G1	TT	W6	30	18	125	487	211	796	31
		6	F-33	R1/G1	TT	W6	30	28	195	615	211	798	31
	9.5-16	6	F-33	R1/G1	TT	W8	30	32	220	730	245	850	30
		6	F-80	R2	TT	W8	30	32	220	730	260	845	43
	9.00-16	8	F-33	R1	TT	W8	40	45	310	1090	234	843	20
		10	T-22	I1	TT	W8	40	52	360	1500	232	848	17
	10.00-16	8	T-22	I1	TL	W8	40	41	285	1215	272	898	19
	11.00-16	8	T-22	I1	TL	W10	40	36	250	1320	305	947	22
	11L-16SL	12	K-81	I1/F3	TL	8LB	30	52	360	1250	263	832	12
18"	7.50-18	8	F-33	R1	TT	5.50F	40	54	370	950	210	860	20
		8	T-22	I1	TT	5.50F	40	54	370	950	220	864	20
	8-18	4	F-33	R1/G1	TT	W6	30	18	125	515	221	840	31
		6	F-33	R1/G1	TT	W6	30	28	195	670	222	840	31
		6	F-35	R1/G1	TT	W6	30	28	195	670	222	845	34
		8	F-35	R1/G1	TT	W6	30	42	290	850	222	845	34
	13.0/65-18	16	K-82	I1/F3	TL	11.00	40	95	655	2800	330	898	12
20"	8.3-20	6	F-35	R1	TT	W7	30	35	240	710	208	890	30
		6	F-36	R1	TT	W7	40	32	220	850	240	945	43
	9.5-20	8	F-36	R1	TT	W7	40	41	285	975	244	948	43
	11.2-20	8	F-35	R1	TT	W9	40	36	250	1150	280	1010	30
22"	9.5-22	6	F-36	R1	TT	W8	40	31	215	900	240	1010	40
24"	8.3-24	6	F-35	R1	TT	W7	40	34	235	800	208	996	30
		6	F-35	R1	TT	W8	40	30	205	850	241	1048	30
	9.5-24	6	F-37	R1	TT	W8	40	30	205	850	241	1085	57
		4	F-37	R1	TT	W10	40	18	125	750	282	1098	57
	11.2-24	6	F-37	R1	TT	W10	40	26	180	1060	284	1103	57
		8	F-39	R1	TT	W10	40	35	240	1250	284	1110	42



F-33

F-34

F-35

F-36

F-37

RIM DIAMETER	TIRE SIZE	PR	PATTERN	TRA CODE	TYPE	STANDARD RIM WIDTH	MAXIMUM SPEED	RELATIVE PRESSURE		MAXIMUM LOAD	INFLATED DIMENSION (mm)		TREAD DEPTH
						(inch)	(km/h)	(psi)	(kPa)	(kg)	SECTION WIDTH	OVERALL DIAMETER	(mm)
24"	12.4-24	8	F-33	R1	TT	W11	40	32	220	1285	286	1160	28
		10	F-33	R1	TT	W11	40	36	250	1550	288	1160	28
		12	F-33	R1	TT	W11	40	48	330	1600	288	1161	28
		4	F-37	R1	TT	W11	40	16	110	850	318	1160	57
		6	F-37	R2	TT	W11	40	25	170	1215	320	1165	57
		8	F-37	R2	TT	W11	40	32	220	1285	322	1170	57
	13.6-24	6	F-37	R2	TT	W12	40	22	150	1215	345	1210	57
		8	F-37	R2	TT	W12	40	28	195	1400	348	1215	57
		8	F-39	R1	TT	W12	40	28	195	1400	346	1212	42
		12	F-39	R1	TT	W12	40	36	250	1650	348	1215	42
	14.9-24	8	F-32	R1	TT/TL	W13	40	26	180	1800	389	1240	30
		12	F-32	R1	TT/TL	W13	40	38	260	2180	395	1245	30
		6	F-33	R1	TT/TL	W13	40	20	140	1550	378	1280	35
		8	F-33	R1	TT	W13	40	26	180	1800	385	1285	35
		12	F-33	R1	TT/TL	W13	40	38	260	2180	386	1286	35
		8	F-37	R1	TT	W13	40	26	180	1800	378	1285	60
		8	G-45	R4	TT/TL	DW13	40	30	205	2300	397	1271	27
		10	G-45	R4	TT/TL	DW13	40	36	250	2800	405	1272	27
	15.5/80-24	12	F-39	R1	TL	W12	40	58	400	4875	390	1275	38
	16.9-24	8	G-45	R4	TT/TL	DW15L	40	28	195	2650	440	1360	27
		10	G-45	R4	TT/TL	DW15L	40	32	220	2900	445	1362	27
		12	G-45	R4	TT/TL	DW15L	40	38	260	3250	450	1363	27
	17.5L-24	10	G-45	R4	TT/TL	DW15L	40	32	220	2800	456	1310	27
		12	G-45	R4	TT/TL	DW15L	40	36	250	2995	460	1321	27
	18.4-24	10	G-45	R4	TT/TL	DW16L	40	28	195	3350	472	1412	28
		12	G-45	R4	TT/TL	DW16L	40	36	250	3750	480	1414	28
	19.5L-24	10	G-45	R4	TT/TL	DW16L	40	30	205	3000	495	1312	27
		12	G-45	R4	TT/TL	DW16L	40	34	235	3450	496	1314	27
		14	G-45	R4	TT/TL	DW16L	40	40	275	3750	498	1315	27
	21L-24	12	G-45	R4	TT/TL	DW18L	40	34	235	3447	558	1410	28
25"	23.5-25	20	F-41	E2/L2	TL	19.5/2.5	10	55	380	10900	630	1638	54
26"	13.6-26	6	F-35	R1	TT	W12	40	22	150	1250	345	1276	47
		8	F-35	R1	TT	W12	40	26	180	1600	348	1280	47
		6	F-37	R2	TT	W12	40	22	150	1250	345	1260	57
		8	F-37	R2	TT	W12	40	26	180	1600	345	1261	57
	23.1-26	16	F-38	R2	TT/TL	DW20B	10	32	220	4375	615	1605	42
28"	12.4-28	26	F-38	LS-2	TL	DW25B	10	32	220	4375	720	1660	55
		6	F-37	R1	TT	W11	40	25	170	1285	315	1260	53
		8	F-33	R1	TT	W11	40	26	180	1500	305	1257	28
		10	F-33	R1	TT	W11	40	32	220	1650	306	1259	28
		12	F-33	R1	TT	W11	40	34	235	1750	307	1260	28
	13.6-28	6	F-37	R2	TT	W12	40	23	160	1450	345	1310	57
		8	F-37	R2	TT	W12	40	29	200	1650	348	1313	57



F-38

F-39

F-80

F-85

G-45

RIM DIAMETER	TIRE SIZE	PR	PATTERN	TRA CODE	TYPE	STANDARD RIM WIDTH	MAXIMUM SPEED	RELATIVE PRESSURE		MAXIMUM LOAD	INFLATED DIMENSION (mm)		TREAD DEPTH
						(inch)	(km/h)	(psi)	(kPa)	(kg)	SECTION WIDTH	OVERALL DIAMETER	(mm)
28"	14.9-28	6	F-35	R1	TT	W13	40	20	140	1650	372	1361	40
		8	F-35	R1	TT	W13	40	26	180	1900	375	1363	40
		12	F-35	R1	TT	W13	40	38	260	2300	378	1365	40
		6	F-36	R1	TT	W13	40	20	140	1650	378	1385	55
		8	F-36	R1	TT	W13	40	26	180	1900	380	1388	55
	16.9-28	8	F-33	R1	TT	W15L	40	25	170	2180	430	1430	40
		10	F-33	R1	TT	W15L	40	29	200	2430	435	1435	40
		12	F-80	R2	TT	W15L	40	35	240	2725	439	1435	57
		8	G-45	R4	TT/TL	DW15L	40	28	195	2800	429	1400	27
		10	G-45	R4	TT/TL	DW15L	40	32	220	3075	430	1405	27
30"	14.9-30	8	F-35	R1	TT	W15L	30	26	180	1950	395	1436	48
		8	F-36	R2	TT	W15L	30	26	180	1950	384	1420	55
	16.9-30	8	F-33	R1	TT	W15L	40	25	170	2300	436	1483	40
		10	F-33	R1	TT	W15L	40	28	195	2430	437	1486	40
		12	F-33	R1	TT	W15L	40	34	235	2500	438	1490	40
		14	F-33	R1	TT	W15L	40	38	260	3000	439	1495	40
		10	F-39	R1	TT	W15L	40	28	195	2430	439	1486	53
	18.4-30	8	F-33	R1	TT	W16L	40	20	140	2430	480	1545	46
		10	F-33	R1	TT	W16L	40	26	180	2900	480	1545	46
		12	F-33	R1	TT	W16L	40	33	230	3250	483	1548	46
		8	F-39	R1	TT	W16L	40	20	140	2430	480	1544	53
		10	F-39	R1	TT	W16L	40	26	180	2900	483	1546	53
		12	F-39	R1	TT	W16L	40	33	230	3250	487	1548	53
		14	F-39	R1	TT	W16L	40	38	260	3450	488	1550	53
		12	F-80	R2	TT	W16L	40	33	230	3250	491	1595	77
32"	12.4-32	6	F-35	R1	TT	W12	40	33	230	1600	315	1265	40
34"	16.9-34	8	F-39	R1	TT	W15L	40	25	170	2430	463	1640	53
		10	F-39	R1	TT	W15L	40	29	200	2650	475	1644	53
	18.4-34	8	F-33	R1	TT	W16L	40	20	140	2650	480	1635	46
		10	F-33	R1	TT	W16L	40	26	180	3000	480	1637	46
		10	F-36	R2	TT	W16L	40	26	180	3000	468	1640	50
		10	F-39	R1	TT	W16L	40	26	180	3000	483	1659	53
		6	F-85	R2	TT	W16L	40	16	110	2000	491	1722	81
38"	13.6-38	8	F-38	R1	TT	W12	40	29	200	1950	345	1555	40
	15.5-38	8	F-38	R1	TT	W14L	40	26	180	1850	401	1555	34
		10	F-38	R1	TT	W14L	40	32	220	2180	403	1560	34
	16.9-38	8	F-38	R1	TT	W15L	40	25	170	2575	430	1685	40
		10	F-38	R1	TT	W15L	40	29	200	2725	433	1690	40
	18.4-38	10	F-39	R1	TT	W16L	40	26	180	2900	487	1795	53
		8	F-85	R2	TT	W16L	40	20	140	2725	485	1798	81
	20.8-38	8	F-85	R2	TT	W18L	40	19	130	3150	535	1904	85

**OTANI®**

DRIVING CONFIDENCE



AGRICULTURAL RADIAL CATALOG 2024

RIM DIAMETER	TIRE SIZE	LI/SS	PATTERN	TRA CODE	TYPE	MAX SPEED	RIM WIDTH		INFLATION PRESSURE			LOAD LIMITS	INFLATED DIMENSION (mm)		RC	SLR	SRI
							REC. RIM	ALT. RIM					SECTION WIDTH	OVERALL DIAMETER			
						km/h	(inch)	(inch)	psi	kPa	kg/cm²	kg	(mm)	(mm)	(index)		
24"	320/85R24 (12.4R24)	122 A8 119 B	A-10	R-1W	TT/TL	40	W11	W9,W10	35	240	2.46	1500	322	1134	3465	515	550
	340/85R24 (13.6R24)	125 A8 122 B	A-10	R-1W	TT/TL	40	W12	W11	35	240	2.46	1500	346	1181	3555	542	575
	380/85R24 (14.9R24)	131 A8 128 B	A-10	R-1W	TT/TL	40	W12	W11,W13	35	240	2.46	1950	380	1256	3750	560	600
30"	420/85R30 (16.9R30)	140 A8 137 B	A-10	R-1W	TT/TL	40	W15L	W13,W14L	40	275	2.81	2500	438	1466	4455	660	700
	420/85R30 (16.9R30)	140 A8 137 B	A-10	R-1W	TT/TL	40	W16L	W14L,W15L	40	275	2.81	2900	471	1529	4686	694	725
34"	460/85R34 (18.4R34)	147 A8 144 B	A-10	R-1W	TT/TL	40	W16L	W14L,W15L	40	275	2.81	3075	466	1666	4965	721	775
38"	460/85R38 (18.4R38)	149 A8 146 B	A-10	R-1W	TT/TL	40	W16L	W14L,W15L	40	275	2.81	3250	457	1753	5270	805	825

*REC. RIM : RECOMMENDED RIM *ALT. RIM : ALTERNATIVE RIM *RC : ROLLING CIRCUMFERENCE *SLR : STATIC LOAD RADIUS *SRI : SPEED RADIUS INDEX *MOST COMMON SPEED = 40km/h