

Made in Thailand




OTANI®

DRIVING CONFIDENCE

TRUCK AND BUS BIAS TIRE

CATALOG 2026

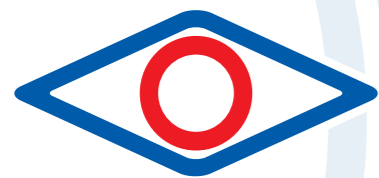

OTANI®

DRIVING CONFIDENCE

OTANI TIRE CO., LTD.

55 MU 7 PHETKASEM ROAD KM.37,
KLONGMAI, SAM PHRAN,
NAKHON PATHOM 73110 THAILAND
Tel. : +66 3432 5000

WEBSITE :

E-MAIL :

OFFICIAL LINE ACCOUNT :

FACEBOOK FANPAGE :

WWW.OTANITIRE.COM

SALES@OTANITIRE.COM

@OTANITIRE

OTANI TIRE



WWW.OTANITIRE.COM

TRUCK AND BUS BIAS TIRE



JUMBO RIB



K-706



L-88



M-RIB



P-10



S-63



S-66



S-67



S-70



S-78



U-068



U-77

RIM DIAMETER	TIRE SIZE	PR	PATTERN	TYPE	LOAD INDEX SPEED SYMBOL	STANDARD	MAX LOAD		MAX LOAD		RELATIVE		TREAD	INFLATED DIMENSION	
						RIM WIDTH	SINGLE	DUAL	PRESSURE	DEPTH	SECTION	OVERALL			
						(Inch)	(kg)	(lbs)	(kg)	(lbs)	(psi)	(kPa)	(mm)	WIDTH	DIAMETER
14"	6.00-14	8	M-RIB	TT	98/96 L	4.50	750	1650	710	1570	60	415	181	687	11
		8	U-77	TT	98/96 L	4.50	750	1650	710	1570	60	415	182	683	10
	6.50-14	8	M-RIB	TT	102/100 L	4.50	850	1870	800	1760	62	425	187	705	11
		8	S-78	TT	102/100 L	4.50	850	1870	800	1760	62	425	179	703	10
		8	U-77	TT	102/100 L	4.50	850	1870	800	1760	62	425	188	702	10
		10	JUMBO-RIB	TT	105/103 L	4.50	925	2040	875	1930	75	515	187	705	10
		10	M-RIB	TT	105/103 L	4.50	925	2040	875	1930	75	515	187	705	11
10	U-77	TT	105/103 L	4.50	925	2040	875	1930	75	515	186	704	10		
15"	7.00-15	10	S-78	TT	113/08 L	5.50	1150	2540	1000	2200	75	515	208	768	12
		12	M-RIB	TT	117/112 L	5.50	1285	2830	1120	2470	90	620	210	768	12
		12	S-66	TT	117/112 L	5.50	1285	2830	1120	2470	90	620	208	768	13
	7.50-15	12	S-78	TT	117/112 L	5.50	1285	2830	1120	2470	90	620	210	769	12
		14	M-RIB	TT	122/121 K	6.00	1500	3300	1450	3200	95	655	210	785	12
	14	S-66	TT	122/121 K	6.00	1500	3300	1450	3200	95	655	210	785	14	
	8.25-15	16	K-706	TT	133/128 G	6.50	2060	4540	1800	3960	130	895	234	845	13
10.00-15	16	K-706	TT	141/136 G	7.50	2575	5680	2240	4940	115	795	282	915	13	
16"	6.50-16	10	S-78	TT	170/103 L	4.50	975	2150	875	1930	75	515	180	754	12
		12	M-RIB	TT	111/109 L	4.50	1090	2400	1030	2270	83	570	188	768	11
		12	S-66	TT	111/109 L	4.50	1090	2400	1030	2270	83	570	198	768	10
	7.00-16	12	M-RIB	TT	116/114 L	5.50	1250	2760	1180	2600	83	570	205	793	12
		12	S-66	TT	116/114 L	5.50	1250	2760	1180	2600	83	570	205	793	14
		12	S-70	TT	116/114 L	5.50	1250	2760	1180	2600	83	570	209	805	16
	7.50-16	8	S-78	TT	113/107 L	6.00	1150	2540	975	2150	60	415	216	826	12
		12	M-RIB	TT	121/119 L	6.00	1450	3200	1360	3000	87	600	224	825	12
		12	S-66	TT	121/119 L	6.00	1450	3200	1360	3000	87	600	217	823	14
		12	S-70	TT	121/119 L	6.00	1450	3200	1360	3000	87	600	217	819	17
		12	S-78	TT	121/119 L	6.00	1450	3200	1360	3000	87	600	217	827	12
		14	M-RIB	TT	123/121 K	6.00	1550	3420	1450	3200	96	660	226	823	12
		14	S-66	TT	123/121 K	6.00	1550	3420	1450	3200	96	660	218	827	14
	14	S-70	TT	123/121 K	6.00	1550	3420	1450	3200	96	660	220	819	17	
	8.25-16	14	S-78	TT	123/121 K	6.00	1550	3420	1450	3200	96	660	218	828	12
		16	U-068	TT	124/122 G	6.00	1600	3520	1500	3300	110	760	223	846	17
14		M-RIB	TT	126/125 K	6.50	1700	3740	1650	3640	83	570	233	845	12	
14		S-66	TT	126/125 K	6.50	1700	3740	1650	3640	83	570	232	850	15	
16		U-068	TT	129/128 K	6.50	1850	4080	1800	3960	105	725	228	848	18	
20"	8.25-20	14	L-88	TT	136/132 G	6.50	2240	4940	2000	4400	115	795	230	977	14
		14	U-77	TT	136/132 G	6.50	2240	4940	2000	4400	115	795	236	971	17
	9.00-20	14	L-88	TT	141/137 G	7.00	2575	5680	2300	5080	110	760	260	1017	14
		14	U-77	TT	141/137 G	7.00	2575	5680	2300	5080	110	760	260	1020	17
	10.00-20	16	L-88	TT	146/142 G	7.50	3000	6600	2650	5840	115	795	280	1058	14
		16	U-77	TT	146/142 G	7.50	3000	6600	2650	5840	115	795	277	1061	17
	11.00-20	18	S-63	TT	149/145 G	7.50	3250	7150	2900	6400	125	860	270	1076	30
		16	L-88	TT	150/145 G	8.00	3350	7400	2900	6400	115	795	300	1087	14
		16	U-77	TT	150/145 G	8.00	3350	7400	2900	6400	115	795	305	1093	17
		18	P-10	TT	152/147 G	8.00	3550	7850	3075	6800	125	860	298	1095	18
		18	S-63	TT	152/147 G	8.00	3550	7850	3075	6800	125	860	290	1110	30
		18	S-67	TT	152/147 G	8.00	3550	7850	3075	6800	125	860	293	1090	21
12.00-20	18	U-068	TT	152/147 G	8.00	3550	7850	3075	6800	125	860	297	1090	18	
	18	L-88	TT	154/150 K	8.50	3750	8250	3350	7400	125	860	326	1120	14	
18	U-77	TT	154/150 K	8.50	3750	8250	3350	7400	125	860	318	1135	19		

• Tire construction and material specifications are subject to change without notice nor obligation.