

มั่นใจใช้ยางโอตานิ



OTANI®

DRIVING CONFIDENCE

TRUCK AND BUS BIAS TIRE

CATALOG 2026



WWW.OTANITIRE.COM

TRUCK AND BUS BIAS TIRE



L-88



M-RIB



S-63



S-66



S-78




U-77

RIM DIAMETER	TIRE SIZE	PR	PATTERN	TYPE	LOAD INDEX SPEED SYMBOL	STANDARD RIM WIDTH		MAX LOAD SINGLE		MAX LOAD DUAL		RELATIVE PRESSURE		TREAD DEPTH	INFLATED DIMENSION (mm)	
						(Inch)	(kg)	(lbs)	(kg)	(lbs)	(psi)	(kPa)	(mm)	SECTION WIDTH	OVERALL DIAMETER	
14"	6.00-14	8	M-RIB	TT	98/96 D	4.50	750	1650	710	1570	60	415	181	687	11	
		8	U-77	TT	98/96 D	4.50	750	1650	710	1570	60	415	182	683	10	
	6.50-14	8	M-RIB	TT	102/100 D	4.50	850	1870	800	1760	62	425	187	705	11	
		8	U-77	TT	102/100 D	4.50	850	1870	800	1760	62	425	188	702	10	
15"	7.00-15	12	M-RIB	TT	117/112 D	5.50	1285	2830	1120	2470	90	620	210	768	12	
		12	S-66	TT	117/112 D	5.50	1285	2830	1120	2470	90	620	208	768	13	
	7.50-15	12	M-RIB	TT	120/118 D	6.00	1400	3080	1320	2910	87	600	210	784	12	
		12	S-66	TT	120/118 D	6.00	1400	3080	1320	2910	87	600	220	780	14	
16"	7.00-16	12	M-RIB	TT	116/114 D	5.50	1250	2760	1180	2600	83	570	205	793	12	
		12	S-66	TT	116/114 D	5.50	1250	2760	1180	2600	83	570	205	793	14	
	7.50-16	8	S-78	TL	113/107 D	6.00	1150	2540	975	2150	60	415	216	826	12	
		12	M-RIB	TT	121/119 D	6.00	1450	3200	1360	3000	87	600	224	825	12	
	8.25-16	12	S-66	TT	121/119 D	6.00	1450	3200	1360	3000	87	600	217	823	14	
		14	M-RIB	TT	126/125 D	6.50	1700	3740	1650	3640	83	570	233	845	12	
20"	8.25-20	14	L-88	TT	136/132 D	6.50	2240	4940	2000	4400	115	795	230	977	14	
		14	U-77	TT	136/132 D	6.50	2240	4940	2000	4400	115	795	236	971	17	
	9.00-20	14	L-88	TT	141/137 D	7.00	2575	5680	2300	5080	110	760	260	1017	14	
		14	U-77	TT	141/137 D	7.00	2575	5680	2300	5080	110	760	260	1020	17	
	10.00-20	16	L-88	TT	146/142 D	7.50	3000	6600	2650	5840	115	795	280	1058	14	
		16	U-77	TT	146/142 D	7.50	3000	6600	2650	5840	115	795	277	1061	17	
	11.00-20	18	S-63	TT	149/145 D	7.50	3250	7150	2900	6400	125	860	270	1076	30	
		16	L-88	TT	150/145 D	8.00	3350	7400	2900	6400	115	795	300	1087	14	
	12.00-20	16	U-77	TT	150/145 D	8.00	3350	7400	2900	6400	115	795	305	1093	17	
		18	S-63	TT	152/147 D	8.00	3550	7850	3075	6800	125	860	290	1110	30	
	12.00-20	18	L-88	TT	154/150 D	8.50	3750	8250	3350	7400	125	860	326	1120	14	
		18	U-77	TT	154/150 D	8.50	3750	8250	3350	7400	125	860	318	1135	19	

• บริษัทขอสงวนสิทธิ์ในการเปลี่ยนแปลงโครงสร้างและวัสดุของยางรถยนต์โดยไม่ต้องแจ้งให้ทราบล่วงหน้า ทั้งนี้เพื่อการพัฒนาผลิตภัณฑ์ให้ดียิ่งขึ้น



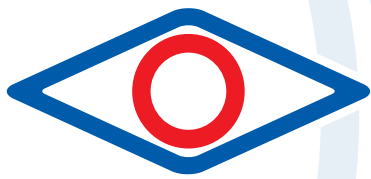

OTANI®
DRIVING CONFIDENCE

บริษัท ยางโอทานิ จำกัด

55 หมู่ 7 ถนนเพชรเกษม กม. 37 ตำบลคลองใหม่
อำเภอสามพราน จังหวัดนครปฐม 73110
Tel. : +66 3432 5000

WEBSITE :

E-MAIL :

OFFICIAL LINE ACCOUNT :

FACEBOOK FANPAGE :

WWW.OTANITIRE.COM

SALES@OTANITIRE.COM

[@OTANITIRE](https://www.facebook.com/OTANITIRE)

[OTANI TIRE](https://www.facebook.com/OTANITIRE)